



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 15/00		(11) International Publication Number: WO 98/30262
A2		(43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/EP98/00023		(74) Agent: QUILLIN, Helen, K.; Glaxo Wellcome plc, Glaxo Wellcome House, Berkeley Avenue, Greenford, Middlesex UB6 0NN (GB).
(22) International Filing Date: 6 January 1998 (06.01.98)		
(30) Priority Data: 9700226.5 8 January 1997 (08.01.97) GB		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(71) Applicant (for all designated States except US): GLAXO GROUP LIMITED [GB/GB]; Glaxo Wellcome House, Berkeley Avenue, Greenford, Middlesex UB6 0NN (GB).		
(72) Inventors; and		
(75) Inventors/Applicants (for US only): DMITROVIC, Bosko [FR/FR]; Laboratoire Glaxo Wellcome, Zone Industrielle No. 2, 23, rue Lavoisier, Boite postale 3531, F-27035 Evreux Cedex (FR). RAND, Paul, Kenneth [GB/GB]; Glaxo Wellcome plc, Park Road, Ware, Hertfordshire SG12 0DP (GB). BRAND, Peter, John [GB/GB]; Glaxo Wellcome plc, Park Road, Ware, Hertfordshire SG12 0DP (GB). SEGUELAS, Etienne [FR/FR]; APE Medical, Z.I. Route de Souppes, Boite postale 13, F-77570 Château-Landon (FR). BUDAY-GOLDBERGER, David [GB/FR]; APE Medical, Z.I. Route de Souppes, Boite postale 13, F-77570 Château-Landon (FR).		


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: INHALATION DEVICE

(57) Abstract

Inhalation device comprising a body (55) defining a reservoir (56) for medicament in the form of a powder, an outlet (57) through which a user can inhale, and a dosing member (53) with at least one metering recess formed therein. The dosing member (53) is moveable between a first position in which the at least one metering recess communicates with the reservoir (56) to receive a dose of powder therefrom and a second position in which the at least one metering recess communicates with the outlet (57) to permit the user to inhale the dose. The at least one metering recess is formed in a face of the dosing member which is urged into contact against a similar mating face of the body at the lower end of the reservoir to form a dynamic seal. At least one of the faces (51) is made of a flexible material having a hardness of less than 80 Shore A.

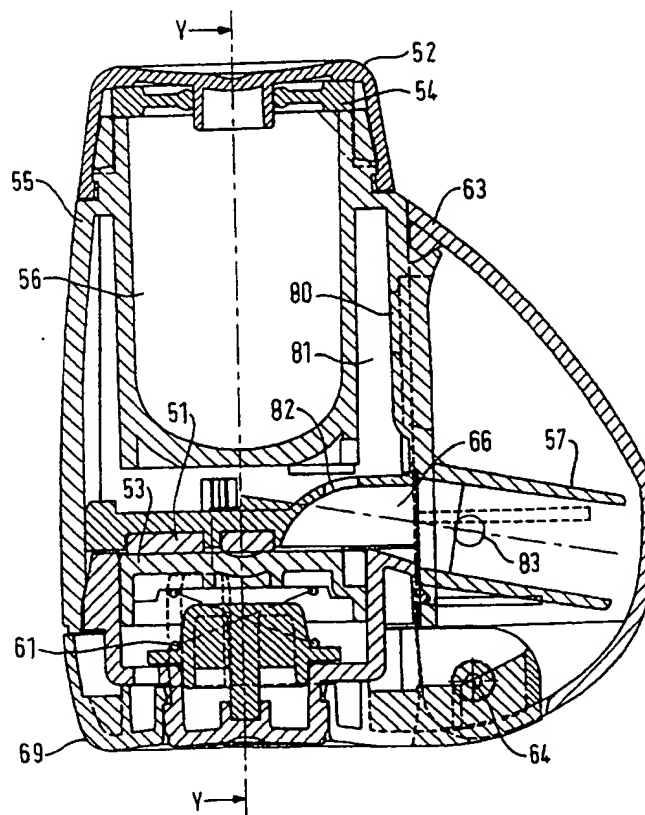

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Inhalation Device

This invention relates to an inhalation device by means of which metered doses of medicament in the form of a powder can be dispersed to a user. In particular
5 it relates to a device of the type in which the medicament powder is held in bulk in a reservoir with which the device is provided, and is metered to the user from the reservoir.

International Patent Application Publication No. WO 96/08284 describes an
10 inhalation device of the type just described, comprising a body defining a reservoir for medicaments in powder form, an outlet through which a user can inhale and a dosing member with at least one metering recess formed therein. The dosing member is moveable between a first position in which the metering recess communicates with the reservoir to receive a dose of powder therefrom
15 and a second position in which the metering recess communicates with the outlet to permit the user to inhale the dose. The metering recess is formed in a smooth flat face of the dosing member which is mounted in contact against a similar flat face of the body at the lower end of the reservoir. The contacting flat faces are made of a hard material having highly polished smooth surfaces which
20 form an effective dynamic seal between the dosing member and body to prevent both loss of powder from and ingress of moisture into the reservoir through the interface between the base and dosing member.

In order to provide the desired sealing characteristics both contacting surfaces
25 must be lapped and polished to ensure very closely matching contours and a high degree of smoothness. Any slight undulation of contour or roughness of

finish in either of the contacting surfaces would impair the sealing characteristics. Thus, the precision of finish required on these surfaces demands accurate lapping and polishing operations which add considerably to manufacturing costs.

5

It is an object to provide a device of the type just described employing an effective dynamic seal which is cheaper and easier to produce.

10

According to the present invention there is provided an inhalation device comprising a body defining a reservoir for medicament in the form of a powder, an outlet through which a user can inhale, and a dosing member with at least one metering recess formed therein, the dosing member being moveable between a first position in which the at least one metering recess communicates with the reservoir to receive a dose of powder therefrom and a second position in which the at least one metering recess communicates with the outlet to permit the user to inhale the dose, the at least one metering recess being formed in a face of the dosing member, the face being urged into contact against a similar mating face of the body at the lower end of the reservoir to form a dynamic seal, characterised in that at least one of the faces is made of a flexible material having a hardness of less than 80 Shore A. The term 'dynamic seal' in this context means a seal that allows and can withstand relative movement of the two faces.

20

25

By having at least one of the sealing faces made of a flexible material it is not necessary for either of the faces to have a precision finish to ensure very closely

matching contours since the flexible material will compensate for any undulations to maintain an effective seal.

Preferably the flexible material has a coefficient of friction of 0.4 or less. By use
5 of a material having a low coefficient of friction the faces will move smoothly and easily over each other so aiding smooth operation of the device.

Suitably the faces are flat.

10 Suitably the mating face of the body is made of a flexible material. Preferably the mating face of the body comprises a rubber insert. Suitably, the rubber insert has a hardness between 40 and 60 Shore A.

Preferably the rubber insert comprises chlorinated butyl or butyl laminated with a
15 contacting face made of a layer of PTFE, polypropylene or polyethylene.

Suitably the face of the dosing member is of unitary construction with the dosing member.

20 The invention is further described below with reference to the accompanying drawings in which:

Figure 1 is a section through a device according to the invention;

25 Figure 2 is a section on line X-X in Figure 1;

Figures 3 to 5 are perspective views showing three steps in the operation of the device according to Figures 1, 2 and 6 to 9;

- 5 Figure 6 is a section through a second embodiment of a device according to the invention;

Figure 7 is a section on line Y-Y in Figure 6;

- 10 Figure 8 is an exploded view of the embodiment shown in Figures 6 and 7;

Figure 9 is an exploded perspective view, partly cut away, showing the dose indicator mechanism of the embodiment shown in figures 6 to 8;

- 15 Figure 10 is a section through a tamper resistant reservoir cover assembly for use with a device according to the invention; and

Figure 11 is an exploded and partially sectioned view through the reservoir cover assembly shown in figure 10.

20

The device shown in cross section in Figures 1 and 2 comprises a main body portion 5 which defines a reservoir 6 and a reservoir cover or end cap 2. The reservoir 6 contains a supply of medicament in the form of a powder (not shown). The medicament is one which is suitable for inhalation, and many such
25 medicaments are well known to those skilled in the art, for example for the treatment of asthma. Powdered medicaments suitable for this purpose include

salbutamol, beclomethasone, salmeterol, fluticasone, formoterol, terbutaline, budesonide and flunisolide, and physiologically acceptable salts, solvates and esters or any combination thereof. Preferred medicaments are salbutamol, salbutamol sulphate, salmeterol, salmeterol xinafoate, fluticasone propionate, beclomethasone dipropionate and terbutaline sulphate. Individual isomers, such as R-salbutamol, can also be used. It is to be understood that the medicament powder may consist purely of one or more active ingredients, or there may additionally be a carrier, for example lactose powder.

10 The reservoir cover 2 may be provided with a desiccant cartridge (not shown) to absorb moisture and reduce the risk of the powder in the reservoir absorbing moisture and undergoing agglomeration of the particles thereof. The cover 2 may be removably secured to the body 5 by any known means, for example by means of a screw thread or a snap fit, to enable refilling of the reservoir 6 with powder. Alternatively, the device may be intended to be disposable after 15 exhaustion of the supply of powder in the reservoir, in which case the cover 2 may be permanently secured to the body 5 by means of an interference fit or by use of an adhesive, ultrasonic welding or any other method, such as that described below with reference to figures 10 and 11. A pharmaceutical grade 20 rubber sealing ring 4 may be incorporated between the cover 2 and body 5 to prevent ingress of moisture into the reservoir 6.

At its lower end the main body portion 5 is fitted with a base 10 which together with body 5 defines an aperture 11 which is offset from the vertical axis of the device and through which powder can pass from the reservoir to the dosing 25 member 3. Powder is guided to the aperture by the walls of the reservoir which

form a hopper. Extending laterally from the lower end of main body 5 is mouthpiece 7. If, however, the device were intended for nasal inhalation this would be replaced by a nosepiece. Dosing member 3 having a metering recess 22 is mounted upon lower body portion 9 which is pivotally connected to main body 5 such that it may rotate about the vertical axis of the device. As explained in more detail below, lower body portion 9 serves to allow rotation of the dosing member 3 whilst maintaining the same in axial alignment with base 10. It also urges the dosing member 3 into close contact with base 10. Dust cover 33 is attached to lower body portion 9 through pivot 34.

10

A weight 31 in the form of a ring encircles the reservoir 6 and is slidable longitudinally thereof. The locus of movement of the weight 31 is defined towards the top of the reservoir by an end stop 32 formed as an integral part of the body 5, and towards the bottom of the reservoir by base 10 which behaves as an anvil. It is to be understood that whilst the device described herein incorporates a weight for the purpose described below, the weight is not an essential element of the invention and it might be chosen to omit the incorporation of the weight.

15

20 The lower face of the base 10 is formed by a flat flexible rubber insert (not shown), while the upper face of dosing member 3 is moulded with a flat contacting face to form a dynamic seal between the body and dosing member. These flat faces provide contacting surfaces between which there is substantially no clearance. Air and powder are thus excluded from the interface between the base 10 and dosing member 3 both in the static state and during the sliding motion of one face over the other minimising both loss of powder

25

from and ingress of moisture into the reservoir 6 through the interface between the base 10 and dosing member 3. This type of dynamic or sliding seal obviates the need for any additional sealing means between base 10 and dosing member 3.

5

The contacting faces need not be provided with precision finishes to provide an effective seal. Any undulations in the flatness of the upper face of the dosing member will be compensated for by the flexible rubber insert to maintain an effective seal. Although adequate performance of the seal may be achieved

10

using a rubber material having a hardness of below 80 Shore A, it has been found that optimal performance of the seal is achieved using a rubber material having a hardness of between 40 and 60 Shore A. If the hardness of the rubber is below 40 Shore A, the rubber insert tends to deform into metering recess 22,

15

so scraping powder out of the recess and reducing the quantity of powder metered. On the other hand, if the hardness of the rubber is above 60 Shore A, the effectiveness of the seal may be impaired. Smooth finishes on both contacting faces are desirable to maintain a good seal, but good results have been obtained from contacting faces moulded directly from highly polished tooling with no additional manufacturing process.

20

The rubber insert may be made from butyl to provide the desired hardness and flexibility. However, butyl has a high coefficient of friction and tends to hinder movement of the contacting faces relative to each other. It is therefore preferable to use either chlorinated butyl or butyl laminated with a contacting

25

face made of a layer of PTFE, polypropylene or polyethylene. Such rubber inserts may be manufactured by standard techniques and provide a contact face

with reduced coefficient of friction. Alternatively, the contacting face may be subject to any other surface treatment that reduces friction, such as plasma modification or varnish.

- 5 PTFE is a particularly suitable material for this purpose due to its low coefficient of friction (below 0.1), though materials having coefficients of friction up to around 0.4 may be acceptable. Good results have been achieved using butyl laminated with a contacting face made of PTFE foil having a thickness of around 0.2mm. The foil may be adhered to the rubber insert without glue using standard
- 10 manufacturing techniques. If the PTFE foil is thinner than 0.2mm, the foil tends to crumple during vulcanisation of the rubber, while if the foil is thicker than 0.2mm, the insert becomes harder and the effectiveness of the seal may be impaired.
- 15 The contacting face of the dosing member may be integrally moulded with the dosing member of any suitable material, e.g. acetal resin. Alternatively, it will be understood that the contacting face of the dosing member may be formed by a flat flexible rubber insert as described above and lower face of base 10 may be integrally moulded in one piece as part of base 10 from a suitable material.
- 20 Alternatively, both faces may be formed by flat flexible rubber inserts as described.

In the embodiment described, the two faces are formed by the surfaces of flat discs. It will be appreciated that disc shapes are not essential. Contact faces

25 may be formed by the surfaces of a frusto-cone and a correspondingly frusto

conical socket, by the contacting surfaces of two co-axial cylinders or by two correspondingly partially spherical contacting ball and socket surfaces.

In operation, the user initially shakes the device in a generally upward and downward motion while maintaining the device in a generally upright orientation as shown in Figure 3. Weight 31 is thereby caused to travel up and down the reservoir, so repeatedly striking end stop 32 and base 10. The jolts which this produces causes the powder in the reservoir to be urged downwardly and to enter the metering recess 22.

The user then opens dust cover 33, as shown in Figure 4, and rotates the cover which is connected to lower body portion 9 as described above and shown in Figure 5, to move the dust cover 33 away from the mouthpiece 7 to allow access thereto and to bring the recess 22 into alignment with the aperture 8 leading to the mouthpiece 7. The user knows when this position has been reached as the lower body portion 9 engages a stop (not shown) and will not move any further. The user then inhales through mouthpiece 7. After inhalation the user returns the lower body portion 9 to its initial position and closes the dust cover 33.

In the device shown in Figures 1 and 2 the aperture 11 is radially offset by an angle of 90° about the vertical axis of the device from the aperture 8 at the inner end of the mouthpiece to allow the dust cover and lower body portion 9 to be moved through 90° for ease of access to the mouthpiece. However, it will be appreciated that this angle can be substantially increased or slightly decreased

according to the desired angle of rotation of the dust cover, lower body portion and dosing member.

5 Further possible modifications to the device described include incorporation of a suitable dose counting mechanism to give the user an indication of the amount of powder remaining in the device.

10 A further embodiment of the invention is shown in Figures 6 to 9. As in the previous embodiments, the device shown in cross section in Figures 6 and 7 and in exploded view in figure 8 comprises an elongate main body portion 55 which defines a reservoir 56 and a reservoir cover or end cap 52. The reservoir 56 contains a supply of medicament in the form of a powder (not shown). The reservoir cover 52 is secured to the body 55 by a snap fit and a pharmaceutical grade rubber sealing ring 54 is incorporated between the cover 52 and body 55 to prevent ingress of moisture into the reservoir 56.

15 At its lower end the main body portion 55 defines an aperture 51 which is offset from the vertical axis of the device and through which powder can pass from the reservoir to a recess 65 in dosing member 53. Base member 60 is fitted to the lower end of body 55, the lower face of base member 60 being provided with a flat flexible rubber insert 51a similar to that described with reference to the embodiment shown in Figures 1 to 5 while upper face of dosing member 53 is moulded with a flat contacting face. Powder is guided to the aperture by the walls of the reservoir which form a hopper. Extending laterally from the lower end of the main body 55 is mouthpiece 57. Dosing member 53 is mounted upon lower body assembly 59 which is pivotally connected to main body 55 such that

it may rotate about the vertical axis of the device. Lower body assembly 59 serves to transmit rotational movement thereof to the dosing member 53 whilst maintaining the same in axial alignment with base member 60. It also urges dosing member 53 into close contact with base 60 by means of spring 61. Dust cover 63 is attached to lower body portion 69 through pivot 64.

A dose indicator drive means comprising a shaft 70 provided with a screw thread over much of its length, a sprung lug 71 at the base of the thread and a sprocket 72 with inclined teeth positioned below the lug is rotatably mounted within a bore 73 in the wall of the main body 55 (see figure 9). An indicator nut 77 is threaded onto the shaft with a projection protruding through an indicator window 74 in the wall of bore 73 which prevents the indicator nut 77 from rotating with shaft 70. Sprung lug 71 engages with teeth 75 formed within bore 73 to form a ratchet allowing shaft 70 to rotate in one direction only. Sprocket 72 is located adjacent the periphery of dosing member 53 which is provided with a second sprung lug 76.

Operation of the device is similar to that described with reference to the embodiment shown in Figures 1 to 5. The user initially shakes the device in a generally upward and downward motion while maintaining the device in a generally upright orientation as shown in figure 3. This encourages powder to flow downwardly and enter metering recess 65 within dosing member 53.

The user then opens dust cover 63, as shown in Figure 4, and rotates the cover which is connected to lower body assembly 59 as described above and as shown in Figure 5, to move dust cover 63 away from mouthpiece 57 to allow

access thereto and to bring recess 65 into alignment with the aperture at 66 leading to the mouthpiece 57. As the dosing member 53 rotates with the lower body assembly 59, lug 76 (Figure 9) engages an inclined tooth presented by sprocket 72 of the dose indicator drive means. The dose indicator drive means is prevented from turning in the direction urged by lug 76 by virtue of the ratchet mechanism formed by teeth 75 and lug 71. As a result, lug 76 rides over the inclined tooth and out of engagement with sprocket 72. The lower body assembly 59 engages a stop (not shown) and will not move any further when the recess 65 is correctly aligned with aperture 66.

The user now inhales through mouthpiece 57. Air is drawn through grill 80 and passage 81, defined by body 55 and hole 82 in base member 60, and entrains the powder in recess 65 of dosing member 53. The airflow draws the entrained powder through the mouthpiece 57 and is inhaled by the user. Further air is drawn into the mouthpiece through holes 83 on either side of mouthpiece 57 and this creates turbulence which helps to break-up any agglomerates of powder entrained.

After inhalation the user returns lower body assembly 59 to its initial position and closes the dust cover 63. As dosing member 53 rotates, lug 76 again engages sprocket 72 of the dose indicator drive means. As the ratchet mechanism formed by teeth 75 and lug 71 allows movement of the dose indicator drive means in the direction as now urged by lug 76, the dose indicator drive means is rotated by one tooth pitch through engagement with lug 76 as it passes sprocket 72. Rotation of the dose indicator drive means causes the captive dose indicator nut 73 to travel down threaded shaft 70. The pitch of the thread and

the number of teeth on sprocket 72 are selected to ensure that the dose indicator nut travels from the uppermost "full" position to the lowermost "empty" position when the device has been used sufficiently to deliver its prescribed number of doses, so indicating to the user that the device is empty.

5

Figures 10 and 11 show an alternative design for a tamper resistant reservoir cover assembly which may be used with a device according to the invention or for other applications where it is desired to seal a container to prevent access to its contents. The cover assembly comprises a cap 90 which has a circular top portion 91 and an annular depending cylindrical portion 92 formed with an outwardly directed protrusion or lip 93 extending around its lower periphery. The cap 90 is made of a material such as polypropylene which allows some resilient flexibility of the cylindrical portion 92, the purpose of which is explained below.

10

15 The top of the body 94 is formed with an outer peripheral wall 97 and a concentric inner peripheral wall 96 which together define the mouth of the reservoir 100. An annular channel 95 is further defined between inner and outer peripheral walls 96, 97. The outer wall 97 has an increased wall thickness extending into channel 95 at distinct locations around its inner face which forms retaining ledges under which lip 93 latches, as seen in figure 10. For manufacturing purposes, the ledges are formed by means of five equispaced slots 98 extending radially through to channel 95 from a groove 102, which is provided around the periphery of outer wall 97 at the same level as the bottom of channel 95. The inner surface of the outer wall forms an inclined slope leading from the upper part of channel 95 to the point of maximum wall thickness just above each slot 98.

20

25

To fit cap 90 to body 94, the cylindrical portion 92 is inserted into channel 95. As the lower periphery of the cylindrical portion 92 contacts the inclined slopes formed on the outer wall 97, the cap 90 is pushed down onto the body 94 such that the cylindrical portion 92 flexes inwardly due to its resilient flexibility at the regions of contact to allow further movement into channel 95, until lips 93 reach slots 98 and snap outwardly to latch under the retaining ledges. When assembled, cylindrical portion 92 is substantially surrounded by outer peripheral wall 97 such that it is concealed and inaccessible from the outside. Sealing ring 99 is sandwiched between the top of inner wall 96 and the underside of top portion 91 to seal the reservoir 100 from the atmosphere. Finally, band 101 of polypropylene or copolymere polypropylene-polyethylene is stretched around groove 102 to hide slots 98 and to prevent access and tampering with lips 93. Once in place, band 101 is not easily removed.

It will be understood that the present disclosure is for the purpose of illustration only and the invention extends to modifications, variations and improvements thereto.

Claims

1. Inhalation device comprising a body defining a reservoir for medicament in the form of a powder, an outlet through which a user can inhale, and a dosing member with at least one metering recess formed therein, the dosing member being moveable between a first position in which the at least one metering recess communicates with the reservoir to receive a dose of powder therefrom and a second position in which the at least one metering recess communicates with the outlet to permit the user to inhale the dose, the at least one metering recess being formed in a face of the dosing member, the face being urged into contact against a similar mating face of the body at the lower end of the reservoir to form a dynamic seal, characterised in that at least one of the faces is made of a flexible material having a hardness of less than 80 Shore A.
2. Inhalation device according to claim 1, characterised in that the flexible material has a coefficient of friction of 0.4 or less.
3. Inhalation device according to claim 1 or 2, characterised in that the faces are flat.
4. Inhalation device according to any preceding claim, characterised in that the mating face of the body is made of a flexible material.
5. Inhalation device according to claim 4, characterised in that the mating face of the body comprises a rubber insert having a hardness of between 40 and 60 Shore A.

6. Inhalation device according to claim 5, characterised in that the rubber insert comprises chlorinated butyl or butyl laminated with a contacting face made of a layer of PTFE, polypropylene or polyethylene.

5

7. Inhalation device according to any preceding claim, characterised in that the face of the dosing member is of unitary construction with the dosing member.

10

8. A tamper resistant closure closing an opening of a container, the container defining an outer peripheral wall adjacent the opening and presenting at least one inner ledge below the opening, the closure comprising a cylindrical skirt portion having a lip on its outer periphery, whereby when assembled the lip forms a snap fit with the ledge to hold the closure in place.

15

9. A tamper resistant closure according to claim 8, wherein the container further defines an inner peripheral wall which seals against the closure when assembled.

20

10. A tamper resistant closure according to claim 8 or 9, wherein, when assembled, the outer peripheral wall conceals the skirt portion such that it is substantially inaccessible from outside.

25

1/7

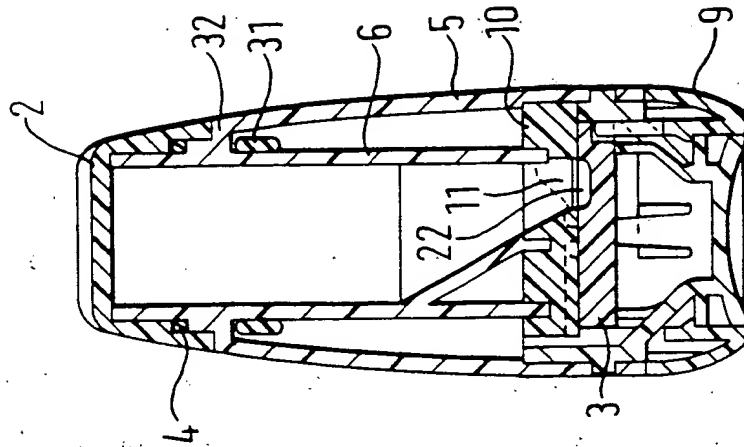


FIG. 2

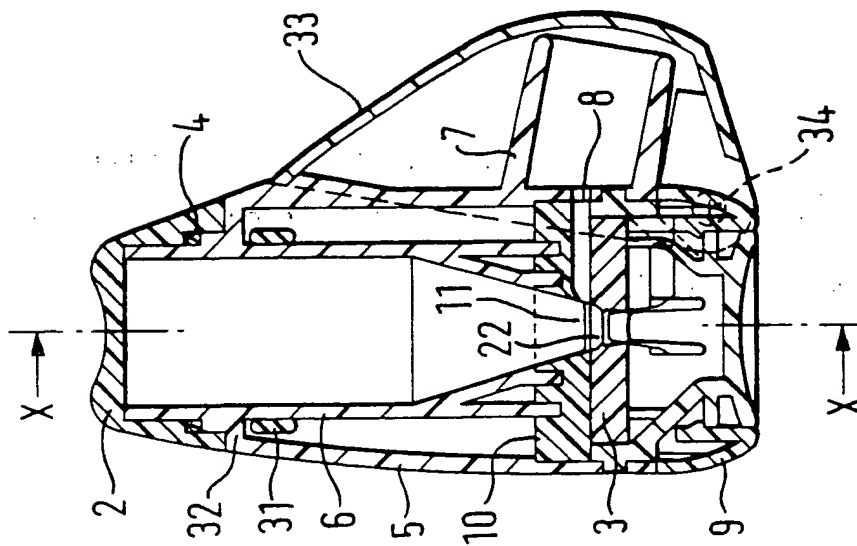


FIG. 1

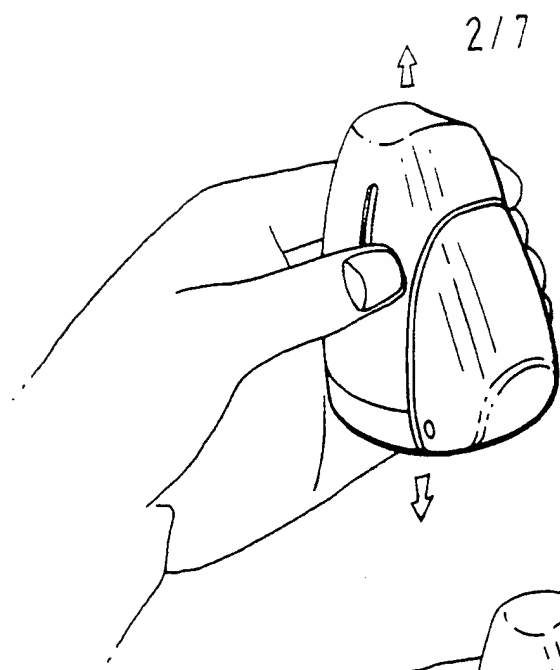


FIG. 3

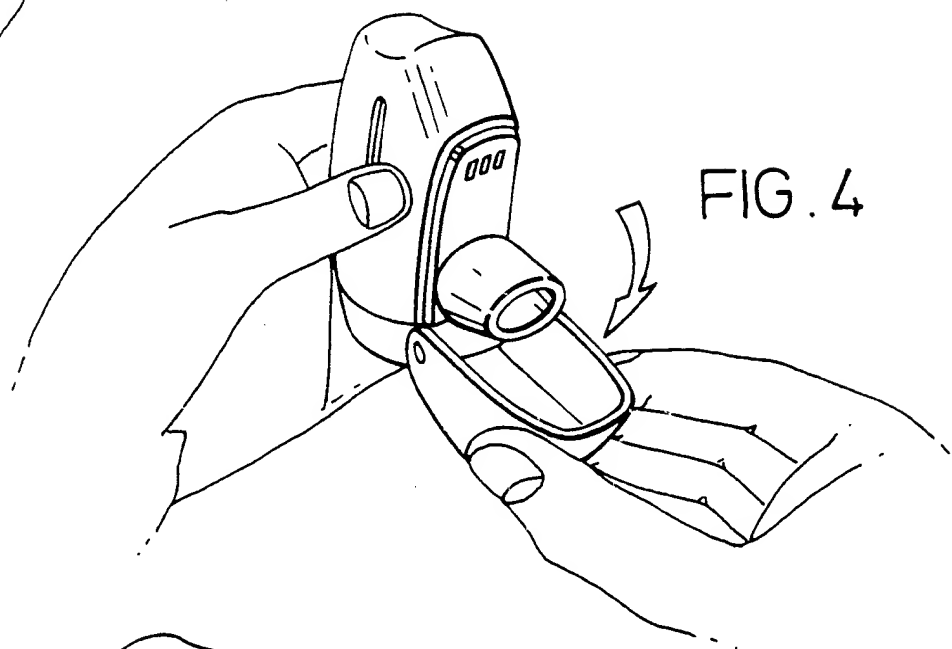


FIG. 4

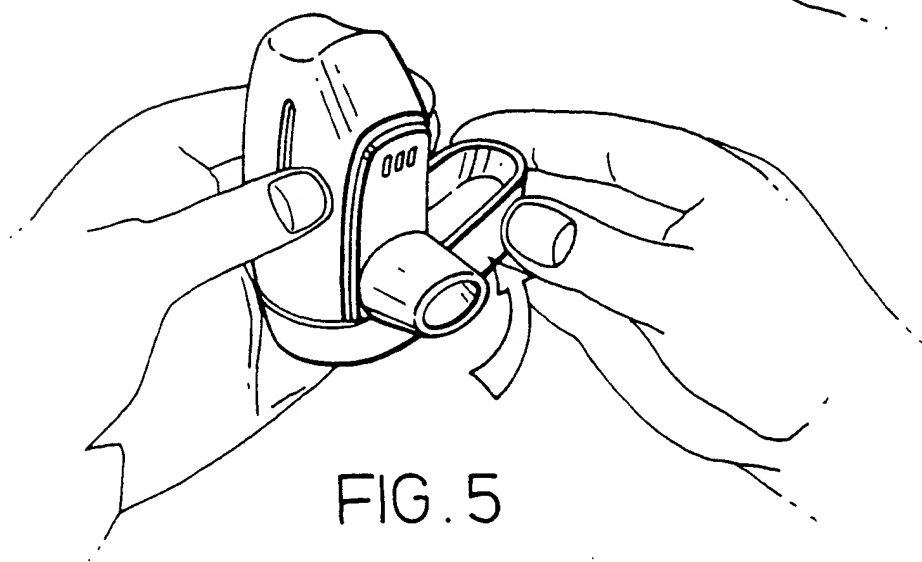


FIG. 5

3/7

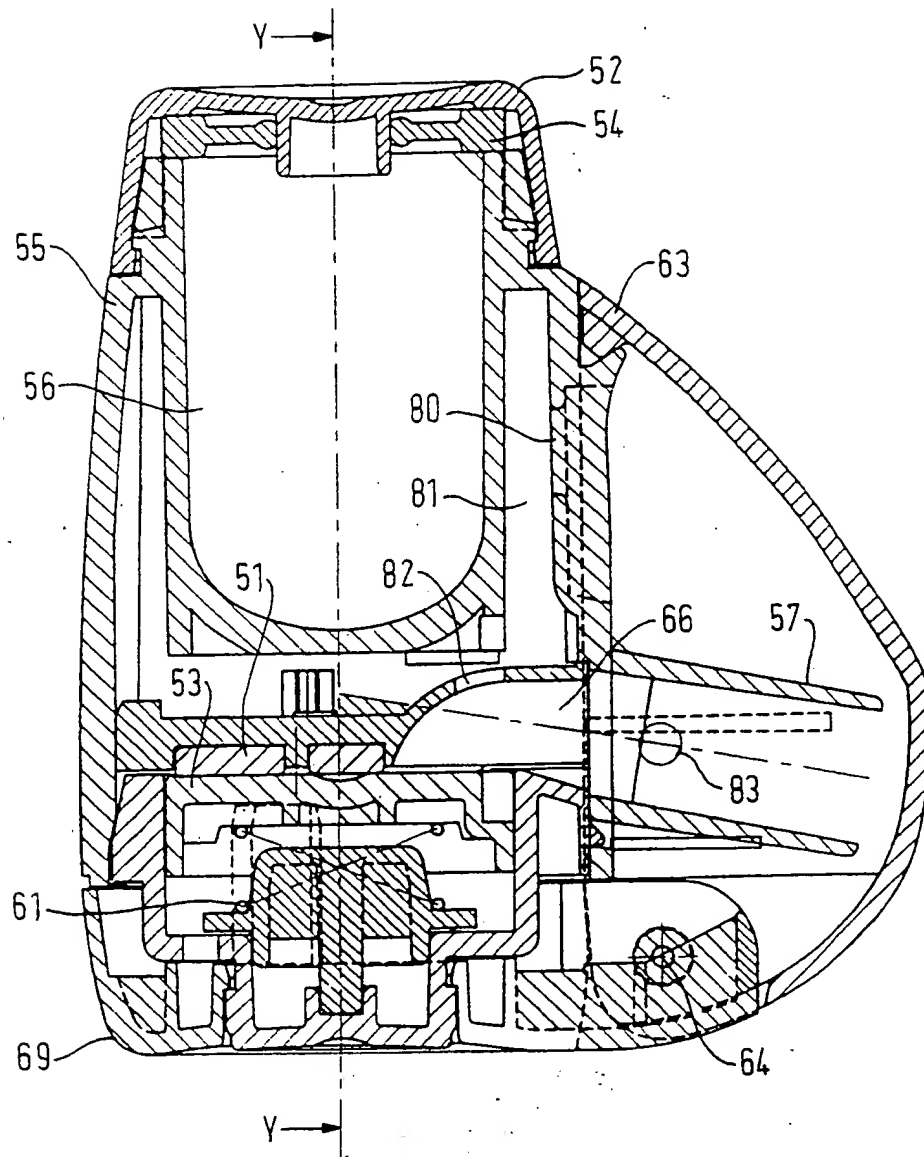


FIG. 6

4/7


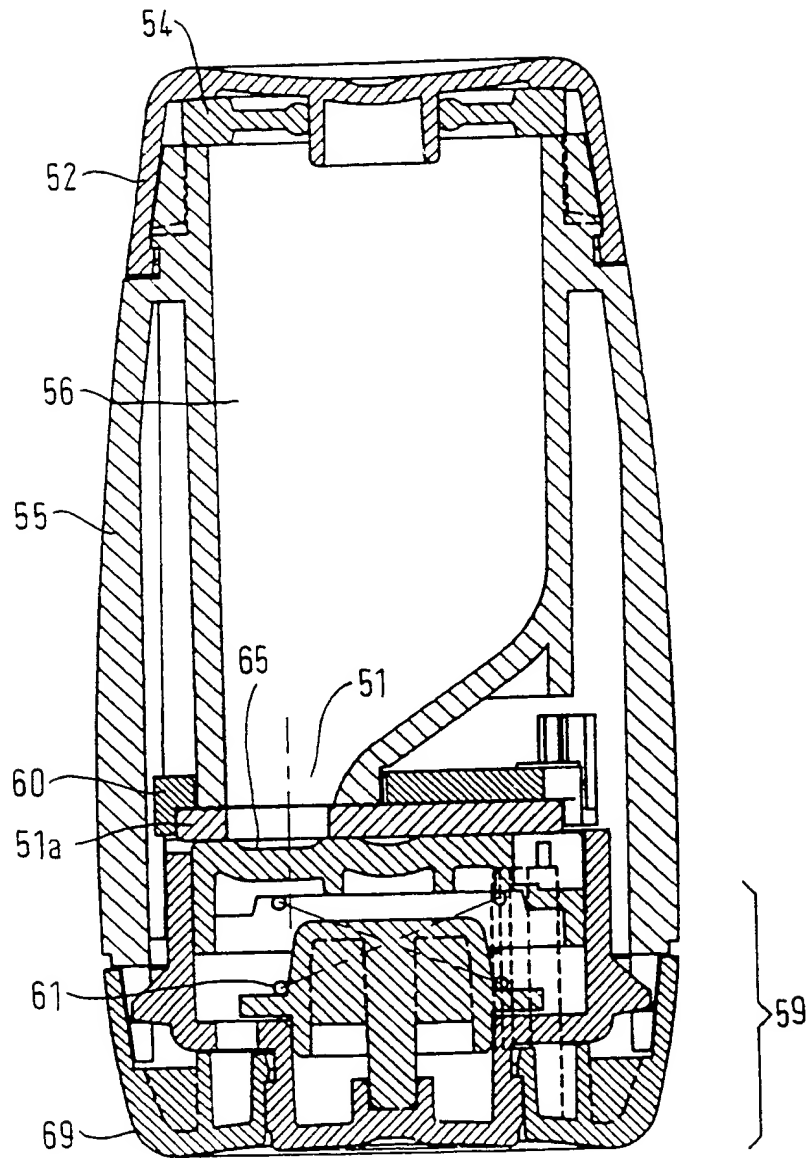


FIG. 7

FIG. 8

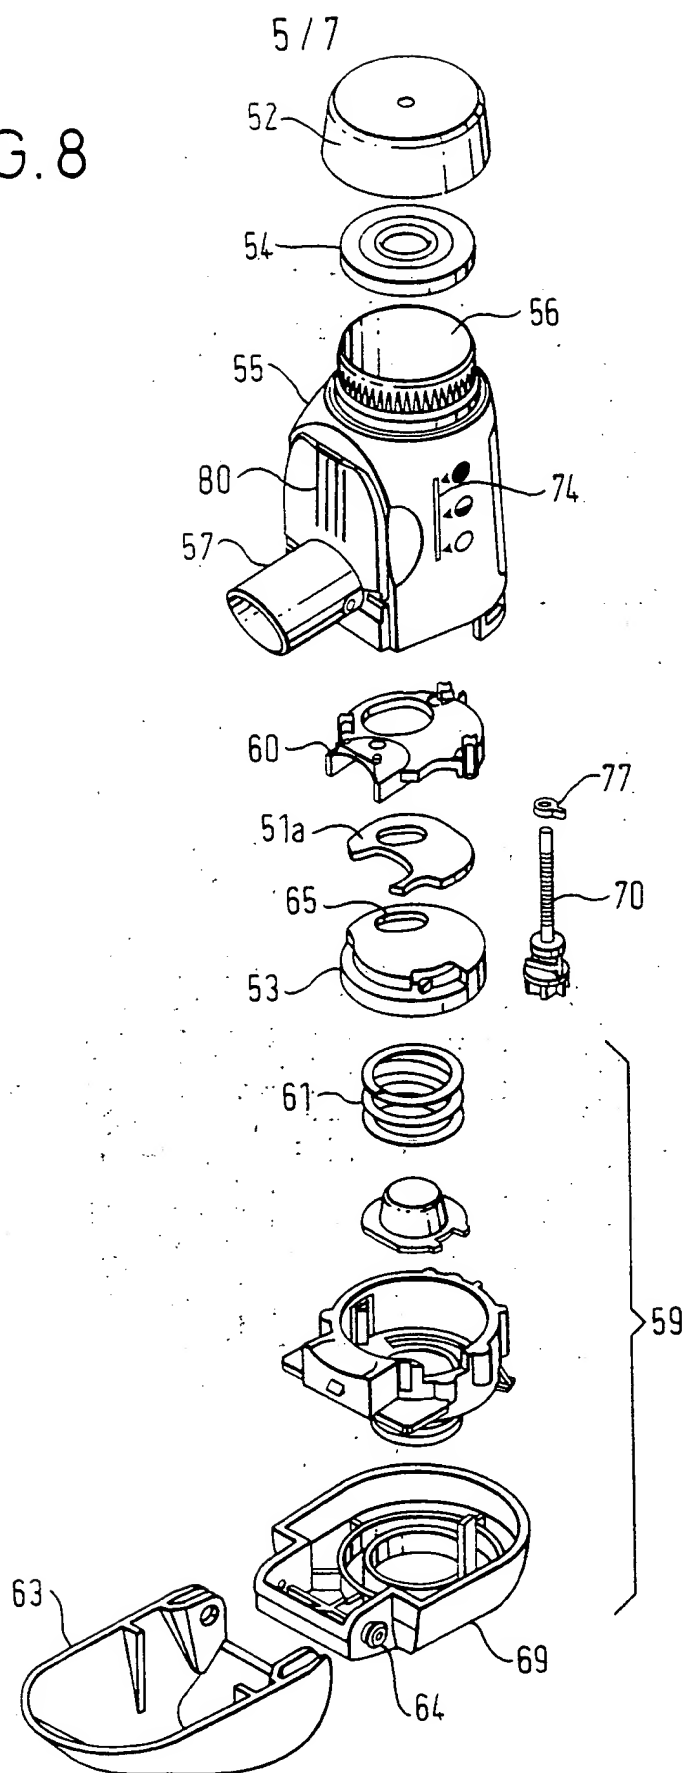

6 / 7

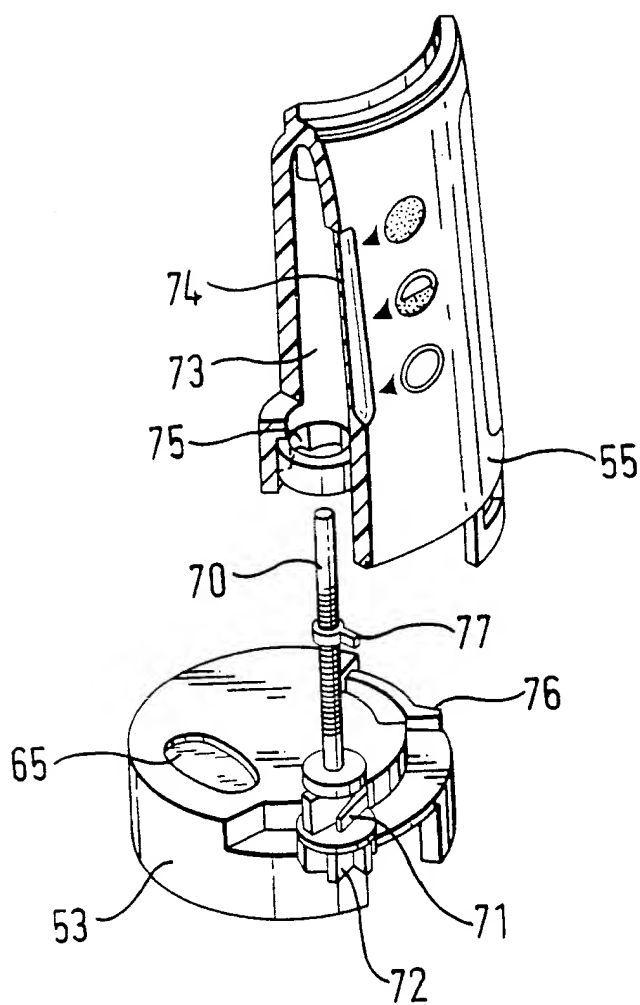


FIG. 9

7/7

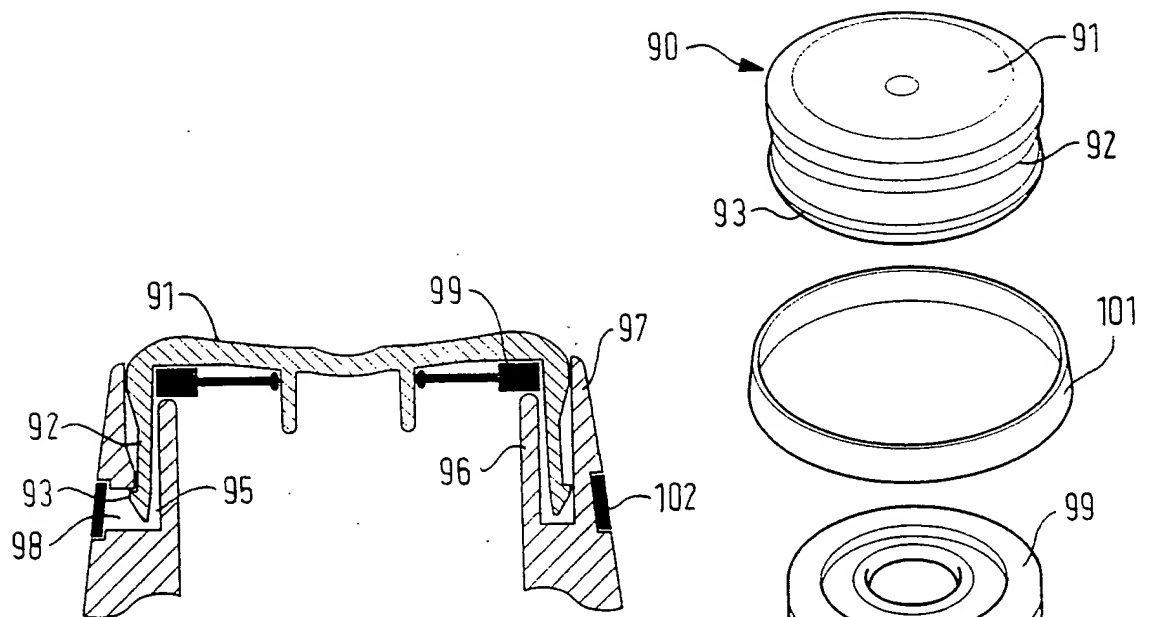


FIG. 10

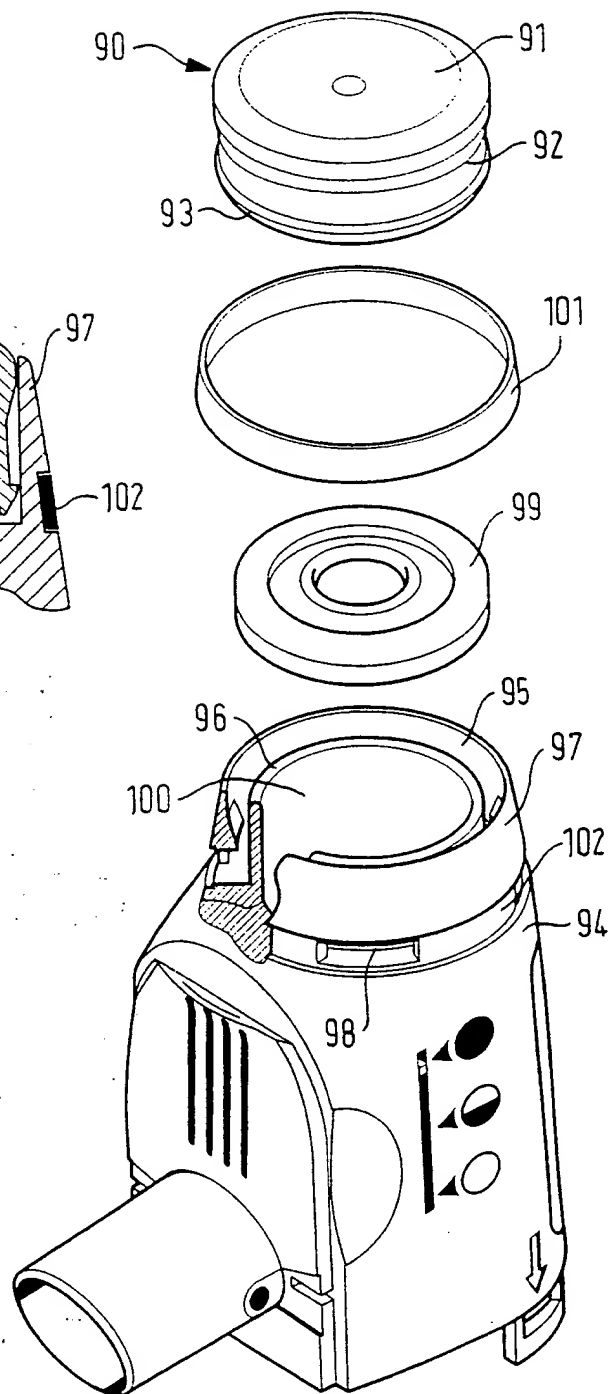


FIG. 11




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 15/00		A3	(11) International Publication Number: WO 98/30262
			(43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/EP98/00023		(74) Agent: QUILLIN, Helen, K.; Glaxo Wellcome plc, Glaxo Wellcome House, Berkeley Avenue, Greenford, Middlesex UB6 0NN (GB).	
(22) International Filing Date: 6 January 1998 (06.01.98)			
(30) Priority Data: 9700226.5 8 January 1997 (08.01.97) GB		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(71) Applicant (for all designated States except US): GLAXO GROUP LIMITED [GB/GB]; Glaxo Wellcome House, Berkeley Avenue, Greenford, Middlesex UB6 0NN (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): DMITROVIC, Bosko [FR/FR]; Laboratoire Glaxo Wellcome, Zone Industrielle No. 2, 23, rue Lavoisier, Boîte postale 3531, F-27035 Evreux Cedex (FR). RAND, Paul, Kenneth [GB/GB]; Glaxo Wellcome plc, Park Road, Ware, Hertfordshire SG12 0DP (GB). BRAND, Peter, John [GB/GB]; Glaxo Wellcome plc, Park Road, Ware, Hertfordshire SG12 0DP (GB). SEGUELAS, Etienne [FR/FR]; APE Medical, Z.I. Route de Souppes, Boîte postale 13, F-77570 Château-Landon (FR). BUDAY-GOLDBERGER, David [GB/FR]; APE Medical, Z.I. Route de Souppes, Boîte postale 13, F-77570 Château-Landon (FR).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
		(88) Date of publication of the international search report: 15 October 1998 (15.10.98)	

(54) Title: INHALATION DEVICE

(57) Abstract

Inhalation device comprising a body (55) defining a reservoir (56) for medicament in the form of a powder, an outlet (57) through which a user can inhale, and a dosing member (53) with at least one metering recess formed therein. The dosing member (53) is moveable between a first position in which the at least one metering recess communicates with the reservoir (56) to receive a dose of powder therefrom and a second position in which the at least one metering recess communicates with the outlet (57) to permit the user to inhale the dose. The at least one metering recess is formed in a face of the dosing member which is urged into contact against a similar mating face of the body at the lower end of the reservoir to form a dynamic seal. At least one of the faces (51) is made of a flexible material having a hardness of less than 80 Shore A.

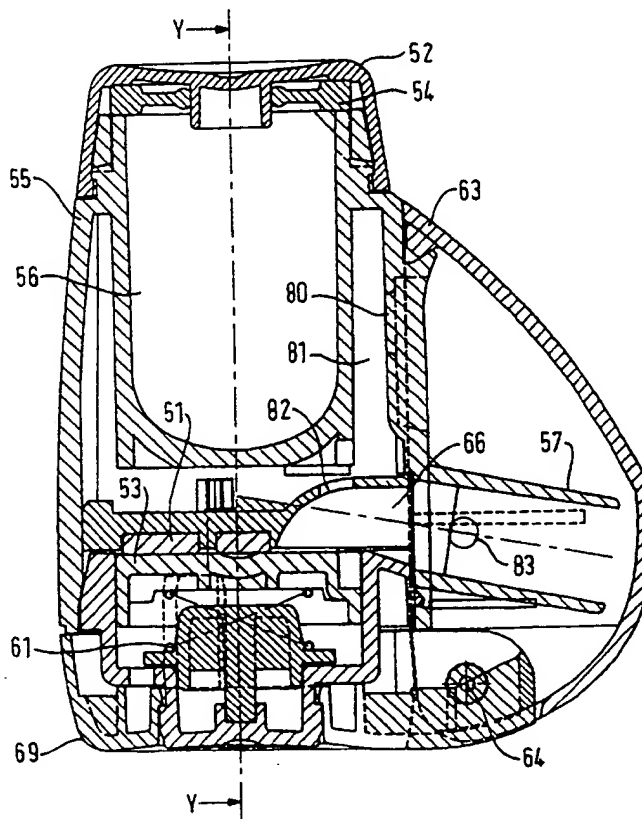

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 98/00023

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61M15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A61M B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 08284 A (GLAXO WELLCOME LAB SA ;SCHAEFFER ALAIN EMILE EDOUARD (FR); SEQUELA) 21 March 1996 cited in the application see page 9, paragraph 2 ---	1,2
A	WO 94 11044 A (MINNESOTA MINING & MFG) 26 May 1994 see page 32, line 31 - page 33, line 7; figure 24 ---	1
A	US 5 524 613 A (HABER TERRY M ET AL) 11 June 1996 see column 6, paragraph 2; figure 3 see column 7, line 36 - line 43 --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

18 August 1998

Date of mailing of the international search report

01.09.98

Name and mailing address of the ISA
European Patent Office, P.B. 5818, Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Villeneuve, J-M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 98/00023

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 762 248 A (UHLIG ALBERT R) 9 August 1988 see abstract see column 9, line 48 - column 10, line 36; figures 21,22 ---	8-10
X	US 3 662 915 A (DESTLER HOWARD L. JR) 16 May 1972 see abstract; figures ---	8-10
A	FR 1 587 657 A (ZAFIRA FRANCE) 27 March 1970 see figure 8 -----	

INTERNATIONAL SEARCH REPORT

international application No.
PCT/EP 98/00023

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims: it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest
- ☒ No protest accompanied the payment of additional search fees

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-7

Inhalation device

2. Claims: 8-10

container closure

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/00023

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9608284 A	21-03-1996	AU 3567095 A	29-03-1996
		BR 9508935 A	06-01-1998
		CA 2199858 A	21-03-1996
		EP 0835146 A	15-04-1998
		FI 971101 A	14-03-1997
		HU 77459 A	28-04-1998
		JP 10505764 T	09-06-1998
		NO 971207 A	14-05-1997
		ZA 9507723 A	30-07-1996
-----	-----	-----	-----
WO 9411044 A	26-05-1994	AU 5595694 A	08-06-1994
		EP 0668787 A	30-08-1995
		MX 9307043 A	31-05-1994
		NO 951880 A	11-07-1995
		ZA 9308365 A	09-05-1995
-----	-----	-----	-----
US 5524613 A	11-06-1996	AU 7637694 A	22-03-1995
		WO 9506491 A	09-03-1995
-----	-----	-----	-----
US 4762248 A	09-08-1988	NONE	
-----	-----	-----	-----
US 3662915 A	16-05-1972	NONE	
-----	-----	-----	-----
FR 1587657 A	27-03-1970	NONE	
-----	-----	-----	-----

This Page Blank (uspto)